


## *Hook blocks with special features*

### **Hook block with clutch between drive and hook**

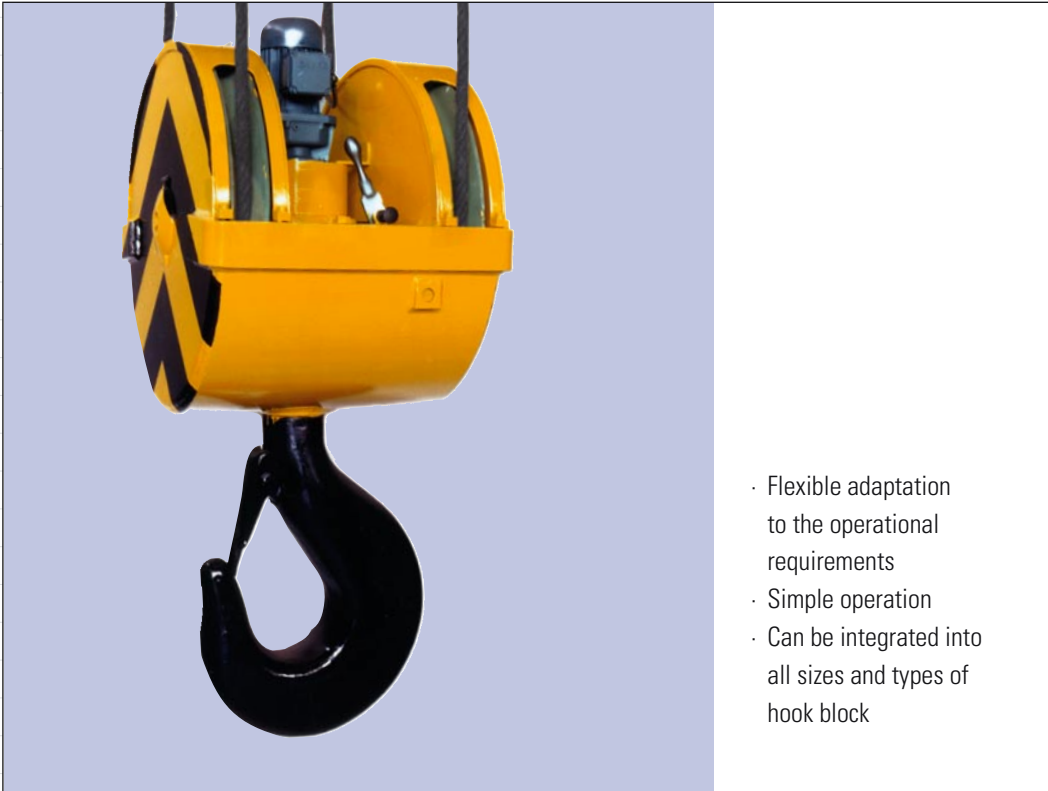

The clutch allows the drive to be separated from the hook in order to load the machines or assembly positions with smaller items.

Therefore the load can easily be rotated by hand. For larger, heavier parts, the slewing gear is attached, in order to allow safe rotation without access by hand.

This solution involves a robust, keyway coupling that can be switched while bearing a load. Alternatively, electromagnetic operation is possible.